


## Building assembly removal

NOTE: POWER MUST BE OFF WHEN PERFORMING THIS

### STEP: 1

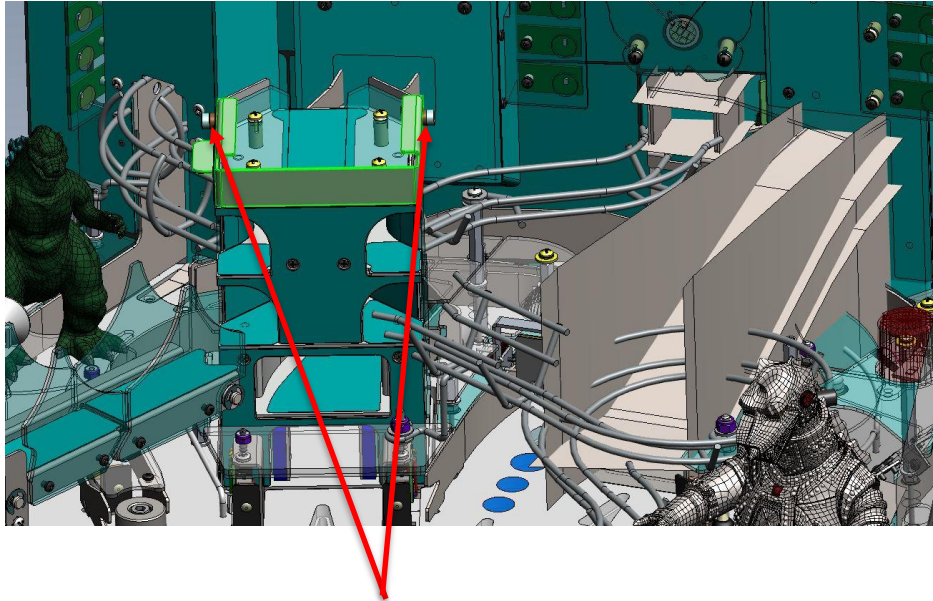


REMOVE THE 2 SHOULDER BOLTS ON THE LOCK GATE AND THEN REMOVE THE LOCK GATE FROM THE BUILDING.

NOTE: Set aside the Shoulder Bolts and Lock gate. These will be re-installed when the new building is installed on the playfield.

(NOTE) The shoulder bolts will either have a standard screw head or a 3/32" allen head.

### STEP: 2


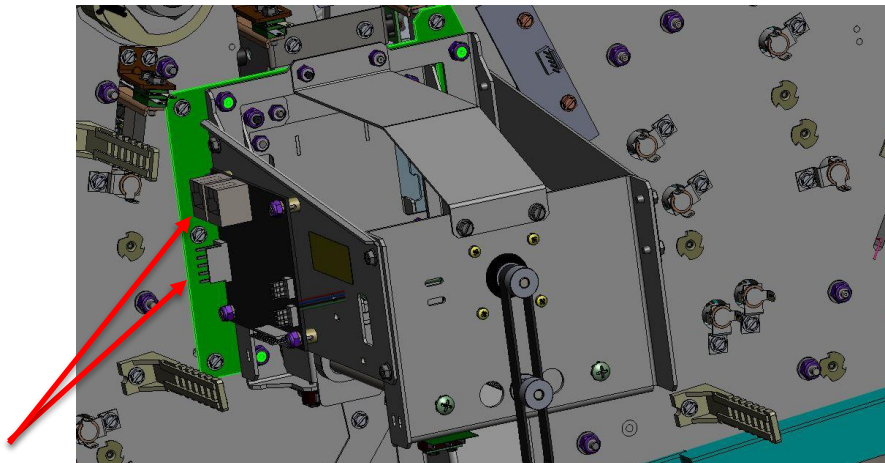


Note which connector locations on the motor driver board are being used.

**DISCONNECT POWER and NETWORK CABLES FROM THE MOTOR DRIVER BOARD**

### STEP: 3

Using a ¼" DRIVER, Remove QTY.6 ¼" inch screws holding the Building assembly onto the bottom of the playfield.

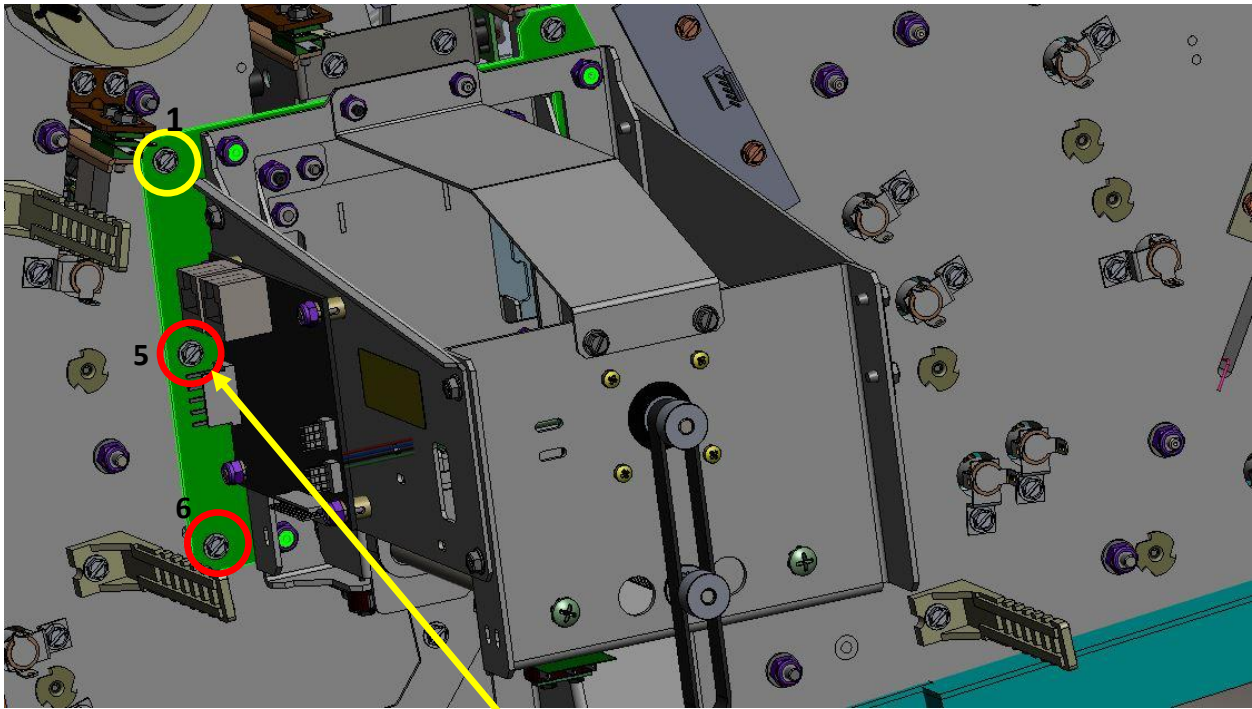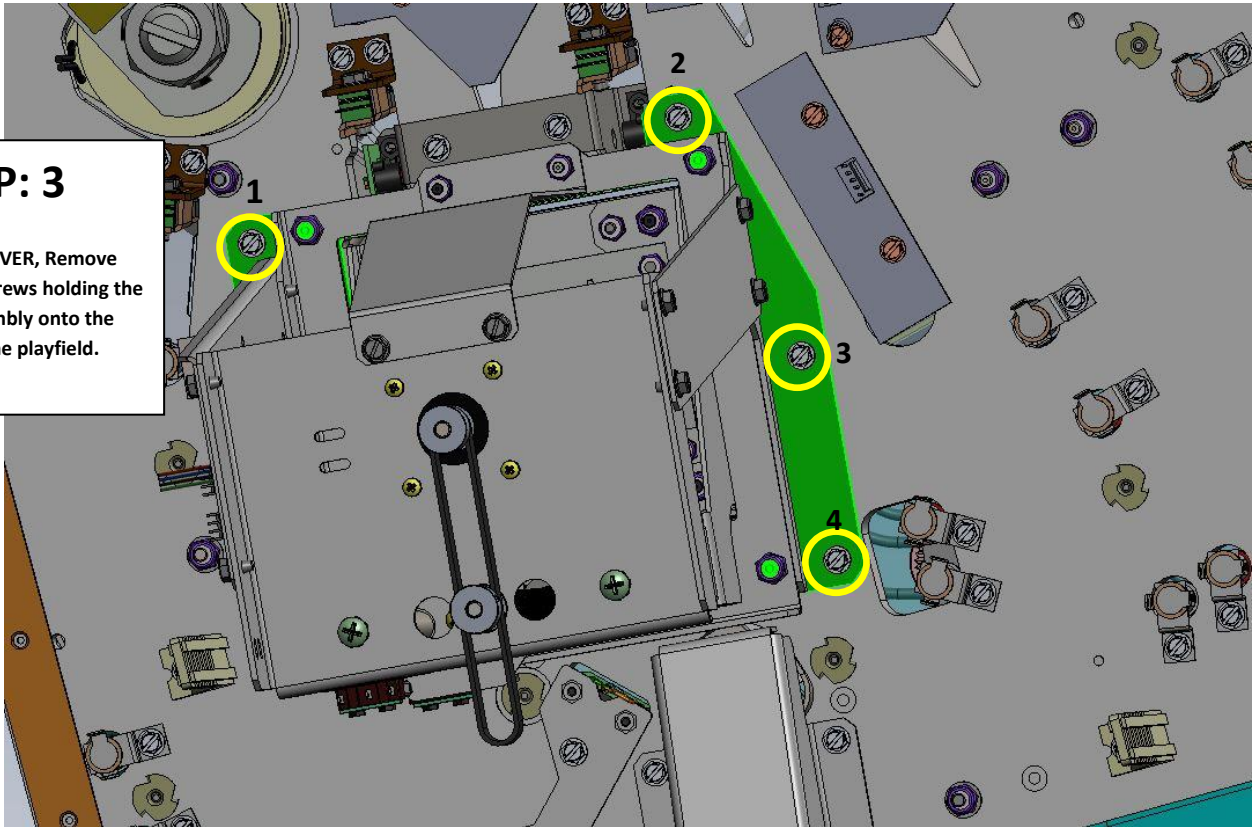

NOTE: MOTOR DRIVER BOARD WILL NEED TO BE REMOVED IN ORDER TO GET SCREW #5 OFF THE BUILDING ASSEMBLY.

Once the last screw has been removed, use caution when pulling the building out from the bottom of the playfield.