

Bill Acceptor AC Power Cable installation instructions

Tools needed:

11/32" Nut Driver

Parts:

036-5700-10 BILL ACCEPT AC CABLE

1. Unplug AC Line cord from back of game.
2. Remove Lockdown bar and playfield glass.
3. Remove Backglass and lay down Speaker panel.
4. Remove AC cover held on by two 11/32 nuts. (See Fig. 1)
5. Locate the 2 pin connector labeled **AC** from under AC cover and remove the colored 2 pin safety connector. (Not Shown)
6. Plug in cable labeled **BILL VAL AC VOLTAGE** into AC distribution cable. (See Fig. 2)

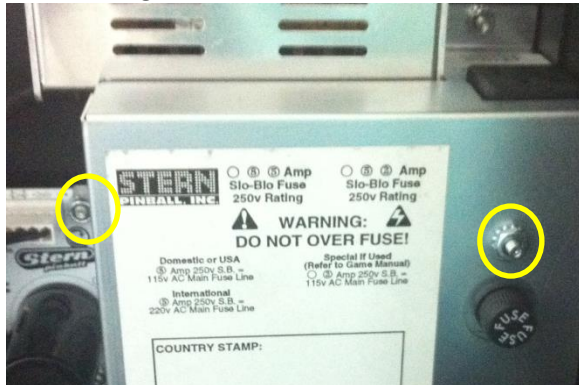


Fig. 1



Fig. 2

7. Drop cable through right hole then dress cable in cabinet through cable clamps. Move playfield as needed to dress cable. (See Fig. 3-Circles)
8. Plug in cable labeled **COIN DOOR AC VOLTAGE** into the 2 pin connector from the Coin Door cable. (See Fig. 3-Square)
9. Reinstall AC cover, Backglass, Speaker panel, Playfield glass and Lockdown bar. Plug AC Line cord into back of game.

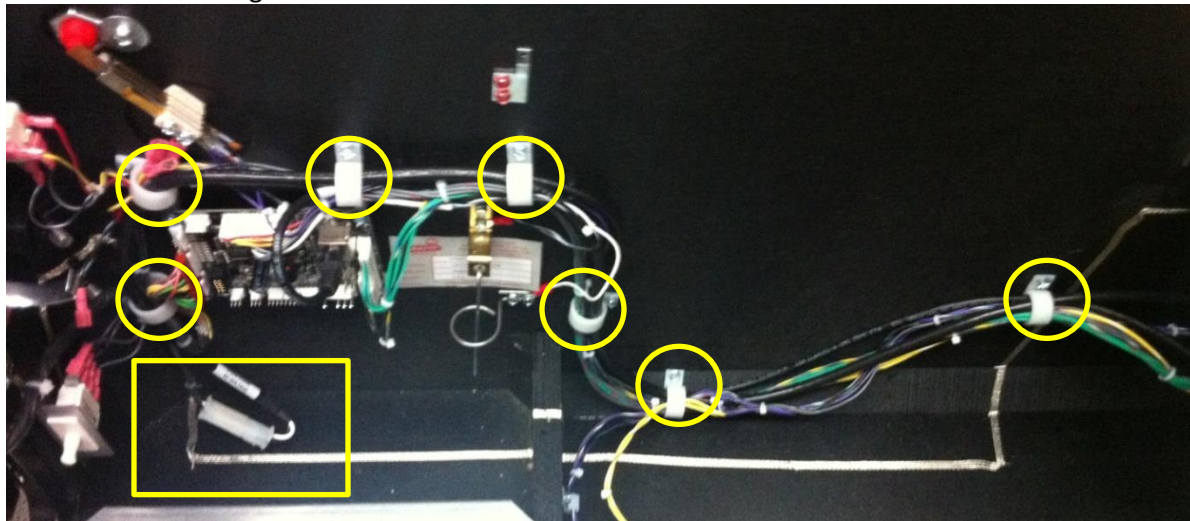


Fig. 3